


UL recognised style 2651, flame test VW-1

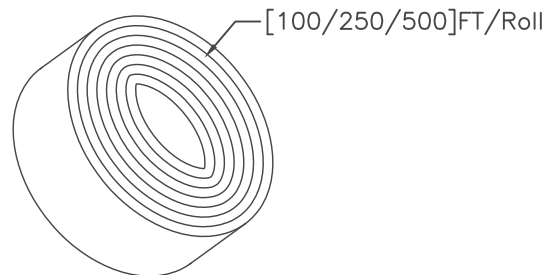

No. Ways	A (mm)	B (mm)	No. Ways	A (mm)	B (mm)	Conductor Size : 28Awg 7/0 12mm ±0.003
6	6.35 ±0.15	7.62 ±0.15	24	29.21 ±0.15	30.48 ±0.15	PH: 1.27 ±0.08mm
9	10.16 ±0.15	11.43 ±0.15	26	31.75 ±0.15	33.02 ±0.15	T : 0.90 ±0.10mm
10	11.43 ±0.15	12.70 ±0.15	30	36.83 ±0.15	38.10 ±0.15	(12-11) = l < 0.15mm
14	16.51 ±0.15	17.78 ±0.15	36	44.45 ±0.20	45.72 ±0.20	(S2-S1) = S < 0.15mm
16	19.05 ±0.15	20.32 ±0.15	50	62.23 ±0.20	63.50 ±0.20	
20	24.13 ±0.15	25.40 ±0.15	64	80.01 ±0.20	81.28 ±0.20	

RoHS Compliant