



SPECIFICATIONS

- RATING** : 100mA max, 42 VAC/DC
- MECHANICAL LIFE** : 1,000,000 cycles
- CONTACT RESISTANCE** : 100mΩ max.(initial)
- INSULATION RESISTANCE** : 1000MΩ min.
- DIELECTRIC STRENGTH** : 1,000 VAC
- FORCE** : 3N±0.75N
- OPERATING TEMPERATURE RANG** : -25°C~+70°C

MATERIALS


- SWITCH HOUSING** : PBT
- TRANSPARENT** : PC
- ACTONTOR** : ABS
- CONTACT** : Stainless,Au plated
- TERMINALS** : Brass,Au plated
- TERMINAL SEAL** : Epoxy



HOW TO ORDER

KS
Keyswitches

MODEL NO. SIZE TYPE CAP TYPE CAP COLOR LED Q'TY 1st SET LED COLOR (B,C Type Cap Only) 2nd SET LED COLOR (A Type Cap Only) CONTACT MATERIAL LED BRIGHTNESS

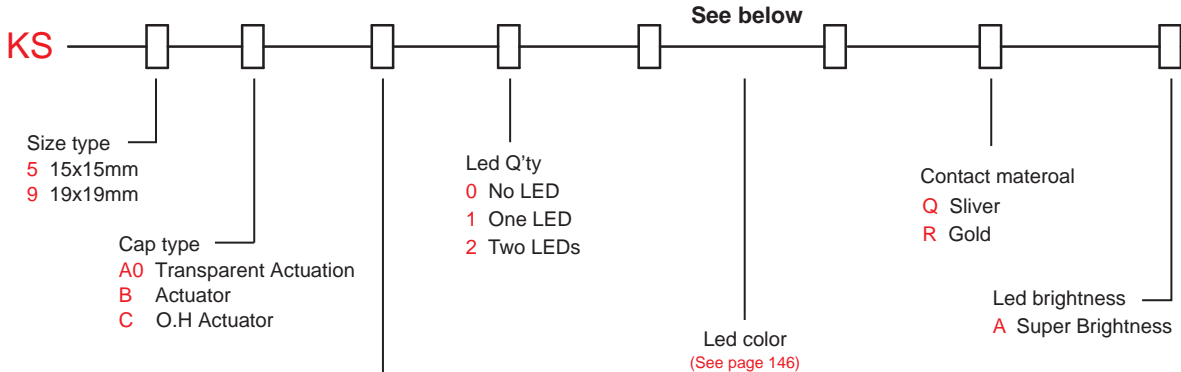


ITEM NO	COLOR
1	White
3	Red
4	Orange
5	Yellow
6	Green
7	Blue


ITEM NO	COLOR
0	Without LED
1	White
3	Red
5	Yellow
6	Green
7	Blue




P.C.B MOUNTING / CIRCUIT




KS5A CAP Type
TOP VIEW

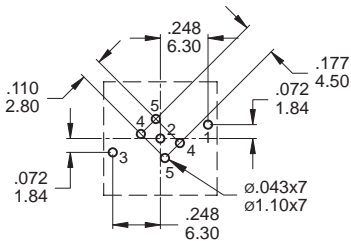


KS5B/C CAP Type
TOP VIEW

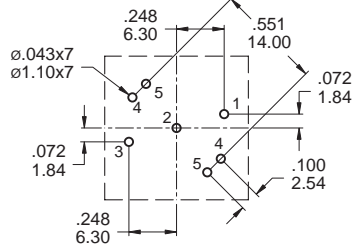

KS9A CAP Type
TOP VIEW



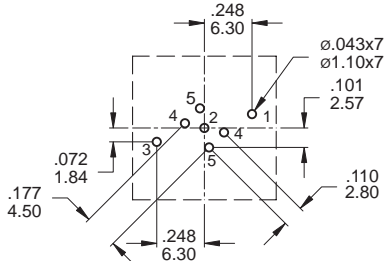


KS9B/C CAP Type
TOP VIEW






CIRCUIT




KS5A



KS5B



KS5C



KS
Keyswitches