

HF3507A(JA3507A)

WIPER CONTROLLER



Features

- High cost performance
- Special integrate circuit, reliable
- Solid base design, stable structure
- Wiper automatic positioning implementation

Typical Applications

Wiper control


CHARACTERISTICS

Norminal voltage	24VDC	Ambient temperature	-40°C to 85°C
Operating voltage range	18VDC to 32VDC	Vibration resistance	10Hz to 200Hz 49m/s ²
Contact rating	Wiper: 50W 24VDC	Shock resistance	196m/s ²
Wiping time	3.5s + 2.5s	Weight	Approx. 35g
Intermission time	5.5s ± 1.5s	Mechanical data	Cover retention: 250N min. Terminal retention: 100N min.
Electrical endurance	3×10 ⁴ OPS (Contact rating, Interval wiping)		

OUTLINE DIMENSIONS AND WIRING DIAGRAM


Unit: mm

Wiring Diagram




1. As shown in left wiring diagram, for HF3507A, terminal 15 is connected with anode of 24VDC, terminal 31 with cathode, terminal I and 53e with combination switch, terminal 31b with wiper's turbine switch, and terminal 53c with cleaning pump switch.
2. Interval wiping: When terminal 53e is connected with wiper through combination switch, terminal I is powered with 24VDC through combination switch, inner relay moves, terminal 53e and 15 open, wiper runs. After terminal 31b gets the feedback signal of 0V, inner relay releases, terminal 53e and terminal 15 close. 5.5s ± 1.5s later, repeat the course above.
3. Cleaning: when terminal 53c is powered with 24VDC, inner relay runs, terminal 53e and terminal 15 close, wiper starts to run until the 24VDC voltage on terminal 53c is removed and time delay 3.5s + 2.5s. After terminal 31b gets the feedback signal of 0VDC, inner relay releases, and wiper stops running.
4. HF3507A includes the function of automatic positioning.

Terminal Layout

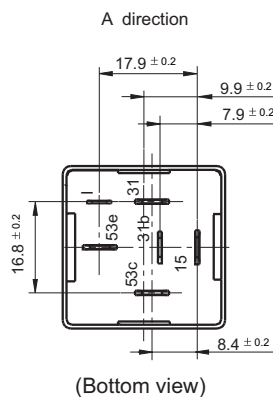

Outline Dimensions

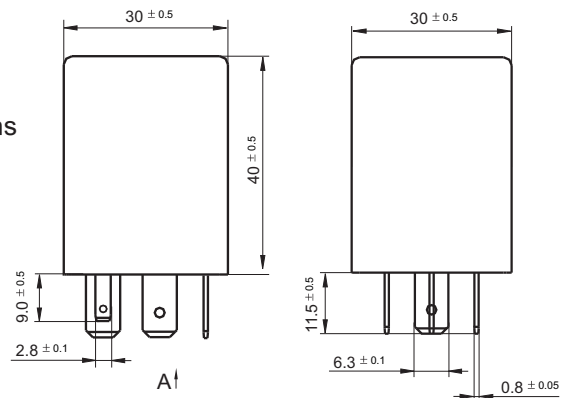

HONGFA RELAY
ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2008 Rev. 1.00